



## MICY

Domus Line design

### Recessed LED profile

#### Materiali:

aluminium, polycarbonate, thermoplastic polymers

#### Finishes:

white

#### Light source:

SHE LED module (180 LED/m)

HE WHC LED module (140 twin LED/m)

#### Wiring:

2000mm



#### Application:

under cabinet, under shelf



#### Installation:

recessed

**MICY** is a symmetrically projecting profile for recessed installation. **MICY** integrates a touch dimmer switch for switching on or off or controlling the brightness. **MICY** is equipped with a smart fitting system using steel clips with lateral pressure.




**Colour appearance** natural white  
**Colour temperature** 4000 K  
**Luminous efficiency** 75 lm/W  
**CRI** Ra ≥ 80



**Colour appearance** warm white  
**Colour temperature** 3000 K  
**Luminous efficiency** 75 lm/W  
**CRI** Ra ≥ 80

\* values referring to MICY SHE 1130mm

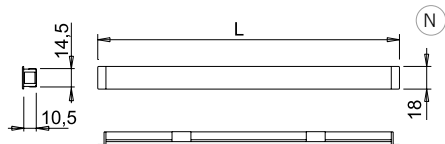

### MICY SHE TD

with touch dimmer switch



Code	Length	Watt & Volt
1332201N/SHE	380mm	4,3W @ 24Vdc
1332301N/SHE	530mm	6,5W @ 24Vdc
1332401N/SHE	830mm	10,8W @ 24Vdc
1332501N/SHE	1130mm	15,1W @ 24Vdc

Code	Light colour*
N	natural white
B	warm white


ALIMENTATORE NON INCLUSO. DA ORDINARE SEPARATAMENTE.



<sup>N</sup> This drawing shows the profile's overall dimensions. See installation manual for more details.



**MICY SHE TD** has an electronic touch dimmer switch, which adjusts the brightness and turns the luminaire on and off "at a touch".

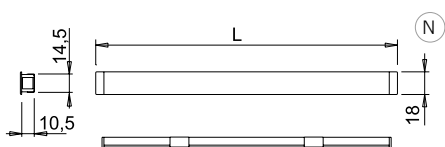

### MICY HE TD WHC

with touch dimmer switch



Code	Length	Watt & Volt
1332201/HE	380mm	2,9W @ 24Vdc
1332301/HE	530mm	4,3W @ 24Vdc
1332401/HE	830mm	7,2W @ 24Vdc
1332501/HE	1130mm	10,1W @ 24Vdc

Code	Light colour*
N	natural white
B	warm white

ALIMENTATORE NON INCLUSO. DA ORDINARE SEPARATAMENTE.



<sup>N</sup> This drawing shows the profile's overall dimensions. See installation manual for more details.



**MICY HE TD WHC** integrates a white changeable LED strip which, using the touch switch, can configure two colour temperatures (NW\_natural white and WW\_warm white). The selection is memorised and can be changed at any time.

<sup>1</sup> For UL-certified model codes, see the **American standard LED collection catalogue**, also available at [www.domusline.com](http://www.domusline.com)

